




## Amyl Acetate

Part No.: 147

# Amyl Acetate



No.147

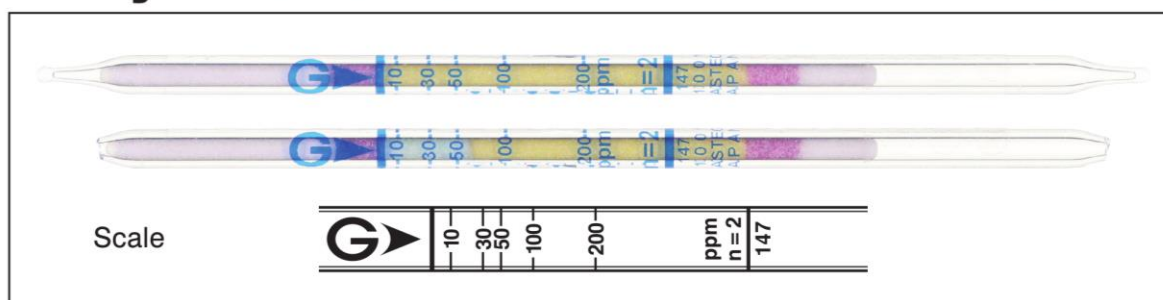

### Performance

Measuring range	10 to 200 ppm
Number of pump strokes	2 (200 mL)
Correction factor	1
Sampling time	3 min
Detecting limit :	4 ppm (2 pump strokes)
Colour change :	Yellow → Pale blue
Operating conditions :	Temperature 5 to 40 °C (41 to 104 °F) correction used Relative humidity 0 to 90 % correction not used
Relative standard deviation :	10 % (for 10 to 200 ppm)
Tube quantity and number of tests per box :	10 tubes for 10 tests
Shelf life :	24 months

### Reaction principle



### Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Alcohols (methanol)		+	Pale blue ( $\geq 5\text{ppm}$ )
Ketones (acetone)		+	Blackish brown ( $\geq 10\text{ppm}$ )
Esters (methyl acetate)		+	No stain observed immediately. A blackish brown colour observed later ( $\geq 30\text{ ppm}$ )

### Calibration gas generation

Diffusion tube method