




### Arsine AsH3

## Part No.:19LA

# Arsine AsH3

# No.19LA

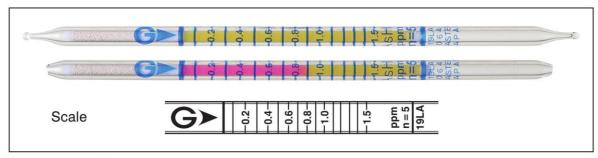

**Performance** The minimum scale value (0.1ppm) is not printed on the tube, but only the scale line is printed.

Measuring range	0.04 to 0.1 ppm	(0.1) to 1.5 ppm	1.5 to 2.4 ppm	2.4 to 10 ppm
Number of pump strokes	10 (1000 mL)	5 (500 mL)	3 (300 mL)	1 (100 mL)
Correction factor	0.4	1	1.6	6.7
Sampling time	15 min	7.5 min	4.5 min	1.5 min

Detecting limit: 0.02 ppm (10 pump strokes)

Colour change : Yellow → Red

Operating conditions: Temperature 0 to 40 °C (32 to 104 °F) correction not used

Relative humidity 0 to 90 % correction not used

Relative standard deviation: 10 % (for 0.1 to 0.5 ppm), 5 % (for 0.5 to 1.5 ppm)

Tube quantity and number of tests per box: 10 tubes for 10 tests

Shelf life: 27 months

### Reaction principle

AsH<sub>3</sub> + 3HgCl<sub>2</sub> → As(HgCl)<sub>3</sub> + 3HCl

HCI + Base → Chloride

### Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Phosphine	≥ 1/10	+	Red
Diborane		No	No No
Hydrogen chloride		No	) NO

### Calibration gas generation

High pressure gas cylinder method