




Carbon Dioxide CO₂

Part No.: 2HH

Carbon Dioxide CO₂

No.2HH

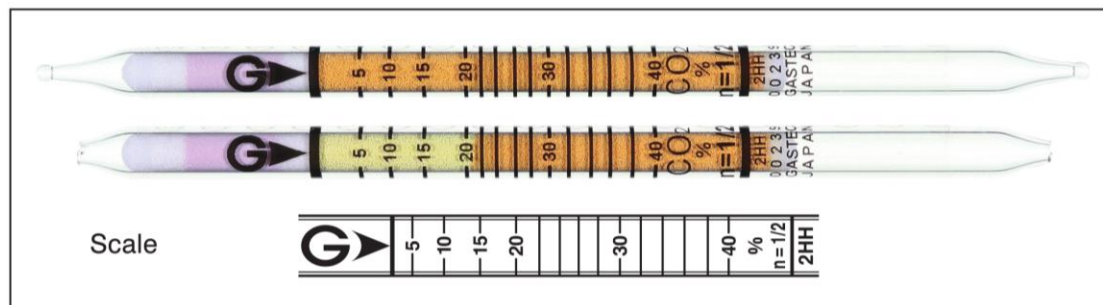

Performance

Measuring range	2.5 to 5 %	5 to 40 %
Number of pump strokes	1 (100 mL)	1/2 (50 mL)
Correction factor	1/2	1
Sampling time	45 sec	45 sec
Detecting limit :	0.04 % (1 pump stroke)	
Colour change :	Orange → Yellow	
Operating conditions:	Temperature 0 to 40 °C (32 to 104 °F) correction not used Relative humidity 0 to 90 % correction not used	
Relative standard deviation :	10 % (for 5 to 10 %), 5 % (for 10 to 40 %)	
Tube quantity and number of tests per box:	10 tubes for 10 tests	
Shelf life :	36 months	

Reaction principle



Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Ammonia	≤ 8%	No	No
Hydrogen chloride	≤ 3%	No	White (≥ 4000 ppm)
Chlorine	≤ 1%	No	White (≥ 1000 ppm)
Hydrogen sulphide	≤ 1/15	No	Pale yellow (≥ 1200 ppm)
Sulphur dioxide	≤ 2%	No	Pale yellow (≥ 2400 ppm)
Nitrogen dioxide	≤ 1/5	No	Pale yellow (≥ 50 ppm)
Ethanol	≤ 7%	No	Pale yellow (≥ 2 %)
Acetic acid	≤ 2%	No	Pale yellow (≥ 4500 ppm)
Trimethylamine	≤ 10%	No	No
Carbon monoxide		No	No
Nitric oxide		No	No
Ethylene, Propane		No	No

Calibration gas generation

High pressure gas cylinder method

Special note

Up to 100 % of carbon dioxide concentrations can be measured by using a Gastec injection type detector tube (No.2HT) which is described.