




Hexane CH₃ (CH₂)₄CH₃

Part No.: 102L

Hexane CH₃ (CH₂)₄CH₃

No.102L

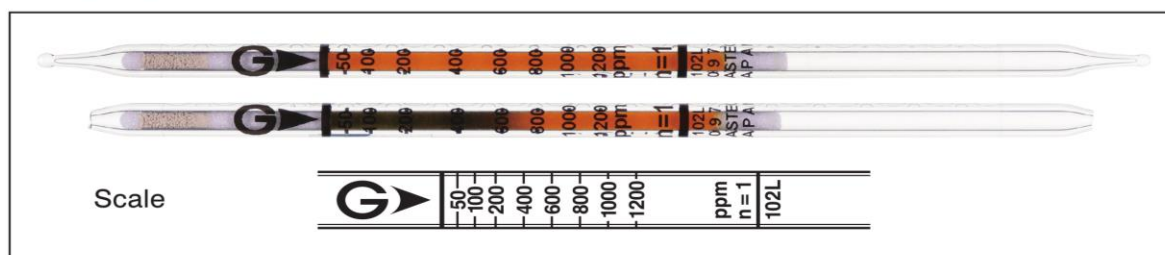

Performance

Measuring range	4 to 50 ppm	50 to 1200 ppm
Number of pump strokes	5 (500 mL)	1 (100 mL)
Correction factor	1/12	1
Sampling time	7.5 min	1.5 min
Detecting limit :	1 ppm (5 pump strokes)	
Colour change :	Yellowish brown → Greenish brown	
Operating conditions :	Temperature 0 to 40 °C (32 to 104 °F) correction not used	
	Relative humidity 0 to 90 % correction not used	
Relative standard deviation :	10 % (for 50 to 400 ppm) , 5 % (for 400 to 1200 ppm)	
Tube quantity and number of tests per box :	10 tubes for 10 tests	
Shelf life :	36 months	

Reaction principle



Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Acetylene		+	Blackish brown
Aromatic hydrocarbons		+	} Greenish brown
Alcohols, Esters, Ketones		+	
Organic solvents (≥ C ₃)		+	
Hydrogen sulphide		+	Blackish brown
Sulphur dioxide		+	Greenish brown

Other substances measurable with this detector tube

Substance	Correction	No. of pump strokes	Measuring range
Acrylonitrile	Factor : 12	1	0.06 to 1.44 %
tert-Butyl alcohol	Factor : 10	2	0.05 to 1.2 %
Chlorocyclohexane	Factor : 1	2	50 to 1200 ppm
Cyclohexane	Factor : 1.2	1	60 to 1440 ppm
Diisobutyl ketone	by scale	2	0.2 to 1.0 %

Calibration gas generation

High pressure gas cylinder method