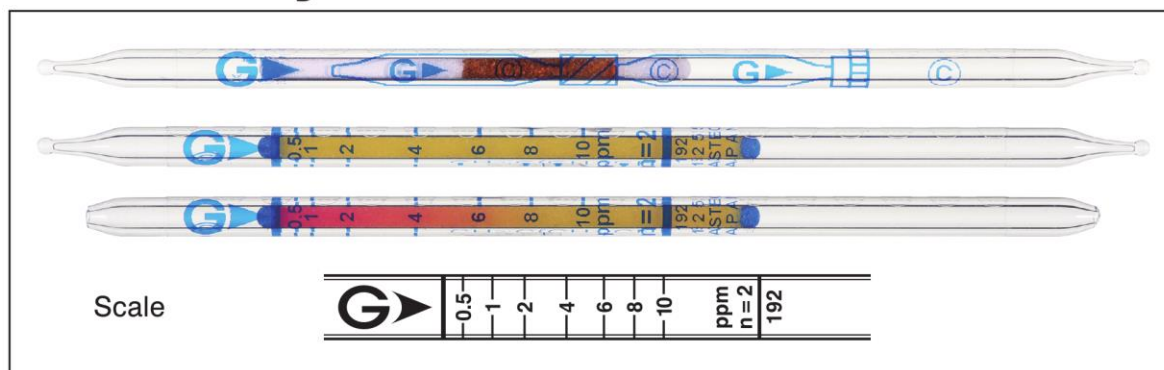


**Methacrylonitrile CH₂:C (CH₃) CN****Part No.: 192****Methacrylonitrile** CH₂:C(CH₃)CN **No.192****Performance**

When used, these tubes are to be connected. See page 2-3.

Measuring range	0.2 to 0.5 ppm	0.5 to 10 ppm	10 to 32 ppm
Number of pump strokes	4 (400 mL)	2 (200 mL)	1 (100 mL)
Correction factor	0.4	1	3.2
Sampling time	8 min	4 min	2 min

Detecting limit : 0.1 ppm (4 pump strokes)


Colour change : Yellow → Red

Operating conditions : Temperature 0 to 40 °C (32 to 104 °F) correction not used
Relative humidity 0 to 90 % correction not used

Relative standard deviation : 10 % (for 0.5 to 10 ppm)

Tube quantity and number of tests per box : 10 tubes for 5 tests

Shelf life : 36 months

Reaction principle**Possible coexisting substances and their interferences**

Substance	Concentration	Interference	Changes colour by itself to
Acetone cyanohydrin		+	} Red
Nitriles (≥ C ₃)		+	
Alcohols, Esters, Ketones	≥ 20 ppm	-	} No
Aromatic hydrocarbons	≥ 20 ppm	-	

Chlorine, hydrogen chloride, hydrogen cyanide, nitric acid and water vapour are trapped in the white layer of the pretreatment tube.

Calibration gas generation

Diffusion tube method