




Methyl Bromide CH₃Br

Part No.: 136L

Methyl Bromide CH₃Br

No.136L

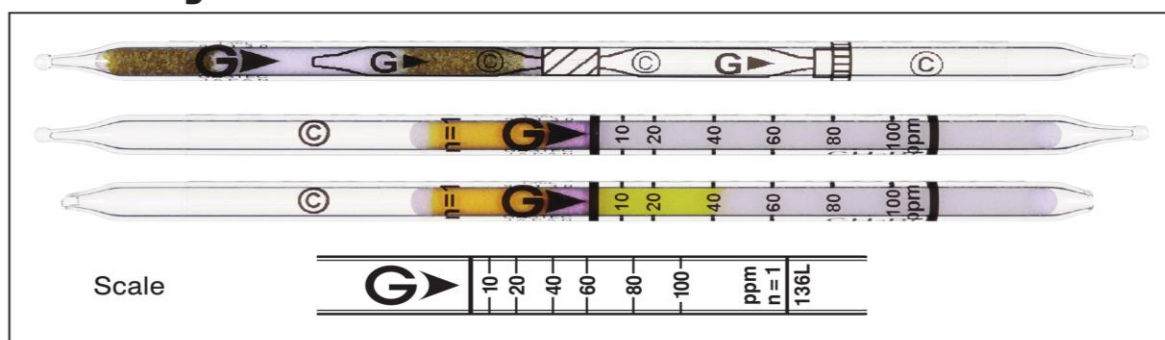


Performance

When used, these tubes are to be connected. See page 2-3.

Measuring range	2.5 to 10 ppm	10 to 100 ppm	100 to 200 ppm
Number of pump strokes	4 (400 mL)	1 (100 mL)	1/2 (50 mL)
Correction factor	1/4	1	2
Sampling time	6 min	1.5 min	45 sec
Detecting limit :	0.5 ppm (4 pump strokes)		
Colour change :	White → Yellow		
Operating conditions :	Temperature 0 to 40 °C (32 to 104 °F) correction not used		
	Relative humidity 0 to 90 % correction not used		
Relative standard deviation :	10 % (for 10 to 20 ppm), 5 % (for 20 to 100 ppm)		
Tube quantity and number of tests per box :	10 tubes for 5 tests		
Shelf life :	27 months		

Reaction principle



Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Bromine, Chlorine		+	Yellow
Nitrogen oxides		+	
Saturated halogenated hydrocarbons		+	

Carbon tetrachloride and unsaturated halogenated hydrocarbons are trapped in the pretreatment tube.

Other substances measurable with this detector tube

Substance	Correction	No. of pump strokes	Measuring range
Benzyl bromide	by scale	1	10 to 100 ppm
Bromoform	by scale	1	1 to 50 ppm
n-Butyl bromide	Factor : 1.0	1	10 to 100 ppm
Chloro bromomethane	Factor : 1.1	1	11 to 110 ppm
1,1-Dibromoethane	Factor : 0.7	1	7 to 70 ppm
1,2-Dibromoethane	Factor : 0.8	1	8 to 80 ppm
Dibromomethane	Factor : 0.5	1	5 to 50 ppm
Ethyl bromide	Factor : 2.0	1/2	100 to 200 ppm
	Factor : 1.0	1	10 to 100 ppm
	Factor : 0.25	4	2.5 to 10 ppm

Calibration gas generation

High pressure gas cylinder method