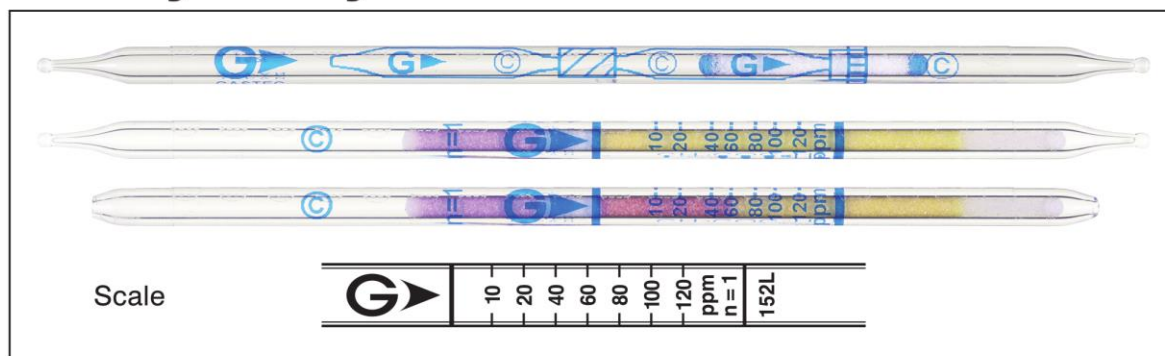


**Methyl Ethyl Ketone CH<sub>3</sub>COC<sub>2</sub>H<sub>5</sub>****Part No.: 152L****Methyl Ethyl Ketone CH<sub>3</sub>COC<sub>2</sub>H<sub>5</sub> No.152L****Performance**

When used, these tubes are to be connected. See page 2-3.

Measuring range	10 to 120 ppm	120 to 384 ppm
Number of pump strokes	1 (100 mL)	1/2 (50 mL)
Correction factor	1	3.2
Sampling time	2 min	1 min

Detecting limit : 3 ppm (1 pump stroke)  
 Colour change : Yellow → Reddish purple  
 Operating conditions : Temperature 0 to 40 °C (32 to 104 °F) correction used  
 Relative humidity 0 to 90 % correction not used  
 Relative standard deviation : 5 % (for 10 to 120 ppm)  
 Tube quantity and number of tests per box : 10 tubes for 5 tests  
 Shelf life : 24 months (in the refrigerator)

**Reaction principle****Possible coexisting substances and their interferences**

Substance	Concentration	Interference	Changes colour by itself to
Acetaldehyde		+	Reddish purple
Acetone		+	Reddish purple
Acetic acid		No	} No
Ethyl acetate		+	
Diethyl ether	≥ 20 ppm	+	
Trichloroethylene		No	
Toluene		No	
Hexane		No	
Methanol	≥ 50 ppm	+	

**Calibration gas generation**

Diffusion tube method