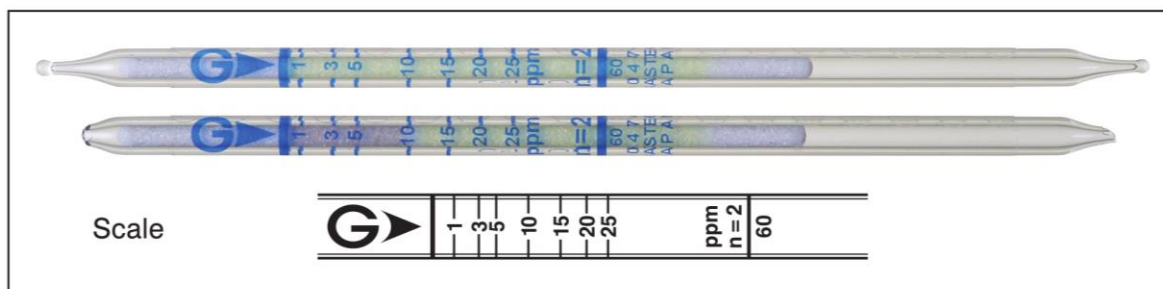



**Phenol C₆H₅OH****Part No.: 60****Phenol C₆H₅OH****No.60****Performance**

Measuring range	0.12 to 1 ppm	1 to 25 ppm	25 to 70 ppm	70 to 183 ppm
Number of pump strokes	4 (400 mL)	2 (200 mL)	1 (100 mL)	1/2 (50 mL)
Correction factor	0.12	1	2.8	7.3
Sampling time	6 min	3 min	1.5 min	45 sec
Detecting limit :	0.1 ppm (4 pump strokes)			
Colour change :	Pale yellow → Gray			
Operating conditions :	Temperature 10 to 40 °C (50 to 104 °F) correction used Relative humidity 0 to 90 % correction not used			
Relative standard deviation :	15 % (for 1 to 5 ppm), 10 % (for 5 to 25 ppm)			
Tube quantity and number of tests per box :	10 tubes for 10 tests			
Shelf life :	24 months (in the refrigerator)			

Reaction principle**Possible coexisting substances and their interferences**

Substance	Concentration	Interference	Changes colour by itself to
Cresol		+	Gray
Amines	≥ 2000 ppm	} + (Unclear demarcation)	} White
Ammonia	≥ 2000 ppm		

Other substance measurable with this detector tube

Substance	Correction	No. of pump strokes	Measuring range
Naphthalene	by scale	2	0.5 to 14 ppm

Calibration gas generation

Diffusion tube method