




Sulphur Dioxide SO₂

Part No.: 5LA

Sulphur Dioxide SO₂


No.5La

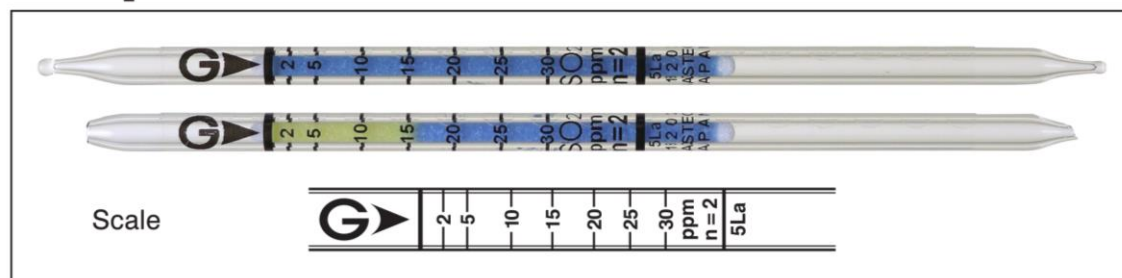

Performance

Measuring range	0.5 to 1 ppm	1 to 2 ppm	2 to 30 ppm	30 to 60 ppm
Number of pump strokes	8 (800 mL)	4 (400 mL)	2 (200 mL)	1 (100 mL)
Correction factor	1/4	1/2	1	2
Sampling time	8 min	4 min	2 min	1 min
Detecting limit :	0.1 ppm (8 pump strokes)			
Colour change :	Blue → Yellow			
Operating conditions :	Temperature 0 to 40 °C (32 to 104 °F) correction not used Relative humidity 0 to 90 % correction not used			
Relative standard deviation :	10 % (for 2 to 10 ppm), 5 % (for 10 to 30 ppm)			
Tube quantity and number of tests per box :	10 tubes for 10 tests			
Shelf life :	36 months			

Reaction principle



Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Nitrogen dioxide	$\geq 1/1$	+	Pale purple
Carbon monoxide		No	} No
Hydrogen sulphide		No	
Nitric oxide		No	
Carbon dioxide	100 %	Unclear demarcation	Unclear demarcation at 100 %

Other substance measurable with this detector tube

Substance	Correction	No. of pump strokes	Measuring range
Thionyl chloride	Factor : 0.72	2	1.44 to 21.6 ppm

Calibration gas generation

Permeation tube method

Special note

If sulphur dioxide coexists with carbon dioxide, an unclear demarcation will result. In this case, use No.5LC detector tube.