




Tetrachloroethylene $\text{Cl}_2\text{C}:\text{CCl}_2$

Part No.: 133HA


Tetrachloroethylene $\text{Cl}_2\text{C}:\text{CCl}_2$ No.133HA

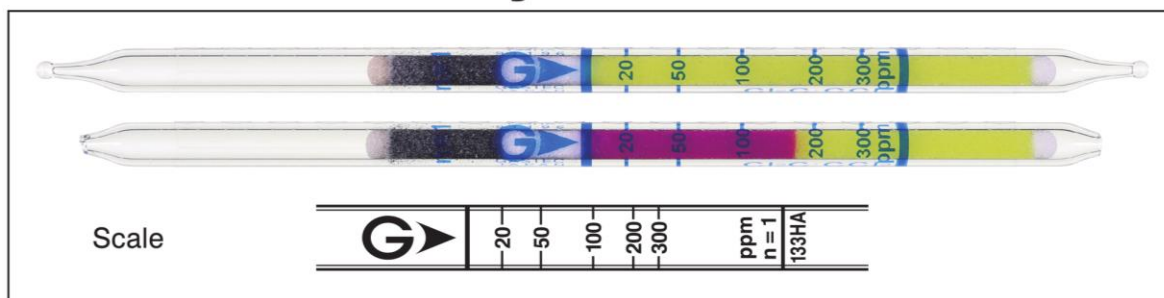

Performance

Measuring range	7 to 20 ppm	20 to 300 ppm	300 to 900 ppm
Number of pump strokes	2 (200 mL)	1 (100 mL)	1/2 (50 mL)
Correction factor	1/3	1	3
Sampling time	1.5 min	45 sec	30 sec
Detecting limit :	0.5 ppm (2 pump strokes)		
Colour change :	Yellow → Reddish purple		
Operating conditions :	Temperature 0 to 40 °C (32 to 104 °F) correction used Relative humidity 0 to 90 % correction not used		
Relative standard deviation :	10 % (for 20 to 100 ppm), 5 % (for 100 to 300 ppm)		
Tube quantity and number of tests per box :	10 tubes for 10 tests		
Shelf life :	30 months (in the refrigerator)		

Reaction principle



Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Bromine, Chlorine		+	} Reddish purple
Hydrogen chloride		+	
Trichloroethylene		+	
1,1,1-Trichloroethane	≥ 3000 ppm	+	

Calibration gas generation

Diffusion tube method