




## Tetrahydrofuran C4H8O

**Part No.:159** 

# Tetrahydrofuran C4H8O

No.159

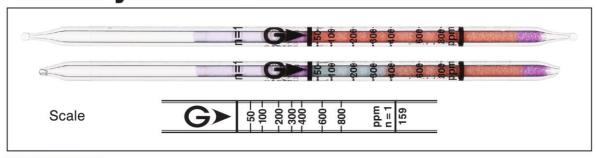

### Performance

Measuring range	20 to 50 ppm	50 to 800 ppm
Number of pump strokes	2(200 mL)	1 (100 mL)
Correction factor	0.4	1
Sampling time	6 min	3 min

Detecting limit : 2 ppm (2 pump strokes)
Colour change : Pale vermilion → Pale blue

Operating conditions: Temperature 0 to 40 °C (32 to 104 °F) correction used

Relative humidity 0 to 90 % correction not used

Relative standard deviation: 15 % (for 50 to 200 ppm), 10 % (200 to 800 ppm)

Tube quantity and number of tests per box: 10 tubes for 10 tests

Shelf life: 36 months

#### Reaction principle

 $C_4H_8O + Cr^6 + H_2SO_4 \rightarrow Cr^3 +$ 

#### Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Alcohols		+	Pale blue

#### Other substance measurable with this detector tube

Substance	Correction	No. of pump strokes	Measuring range
1,4-Dioxane	by scale	2	25 to 140 ppm

#### Calibration gas generation

Diffusion tube method