




Water Vapour H₂O


Part No.: 6AH

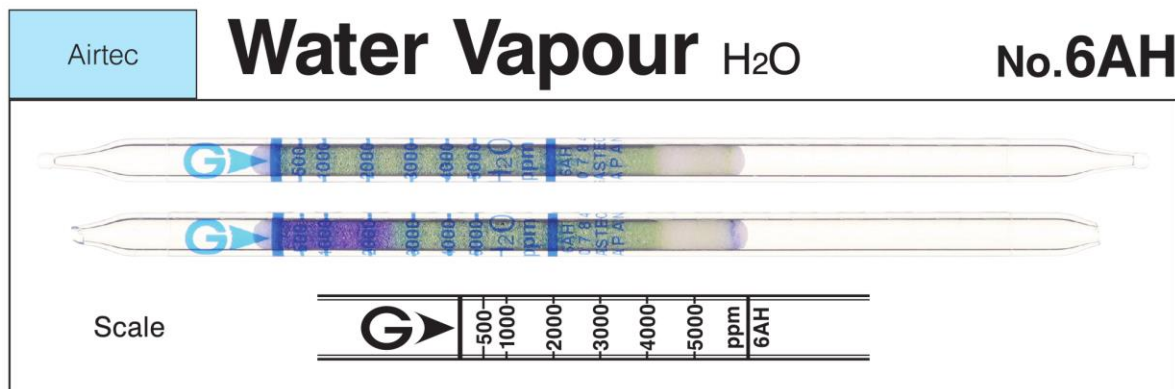

Performance

Measuring range	500 to 5000 ppm
Sampling rate	300 mL/min (300 mL)
Correction factor	1
Sampling time	1 min
Detecting limit :	300 ppm
Colour change :	Green → Purple
Operating conditions :	Temperature 0 to 40 °C (32 to 104 °F) correction not used
Relative standard deviation :	10 % (for 500 to 1000 ppm) , 5 % (for 1000 to 5000 ppm)
Tube quantity and number of tests per box :	10 tubes for 10 tests
Shelf life :	36 months

Reaction principle



Calibration gas generation

Bubbling method