




Chloroform CHCl_3

Part No.:137

Chloroform CHCl_3

No.137

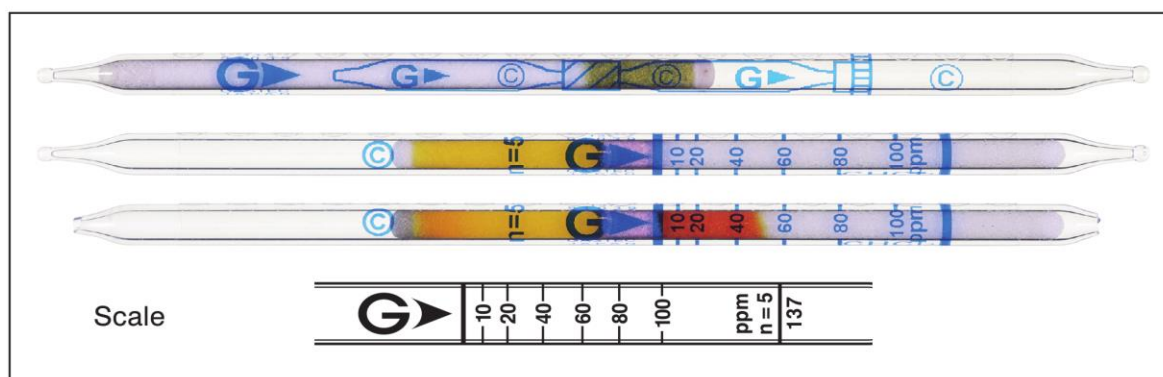

Performance

When used, these tubes are to be connected. See page 2-3.

Measuring range	4 to 10 ppm	10 to 100 ppm	100 to 400 ppm
Number of pump strokes	7 (700 mL)	5 (500 mL)	3 (300 mL)
Correction factor	0.4	1	4
Sampling time	10.5 min	7.5 min	4.5 min

Detecting limit : 1 ppm (7 pump strokes)

Colour change : White → Orange


Operating conditions: Temperature 0 to 40 °C (32 to 104 °F) correction not used
Absolute humidity correction used

Relative standard deviation : 15 % (for 10 to 20 ppm),
10 % (for 20 to 100 ppm)

Tube quantity and number of tests per box : 10 tubes for 5 tests

Shelf life : 36 months

Reaction principle



Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Bromine	$\geq 1/20$	+	Orange
Chlorine	$\geq 1/20$	+	
Iodine	$\geq 1/20$	+	
Saturated halogenated hydrocarbons	$\geq 1/10$	+	
Unsaturated halogenated hydrocarbons	$\geq 1/20$	+	

Calibration gas generation

Diffusion tube method